


M42-PROFILER

The special variable tooth with slightly positive rake angle and heavy group set shows excellent performance on beams and similar shapes.

Also coated available **C-TEC** for extremely increased feed rates, significantly reduced cutting times and maximized blade life.

Engineered for:

- large cross-section steel beams
- structurals with residual stress

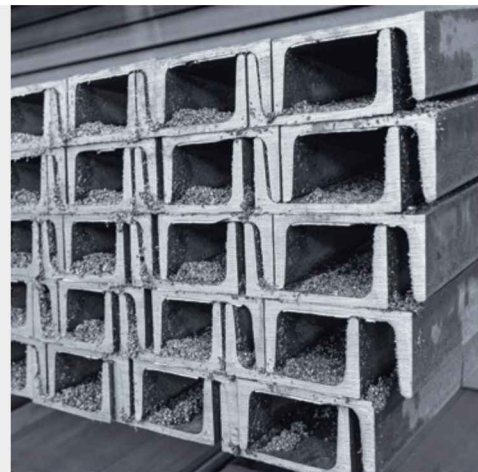

Dimensions		Tooth			
mm	inch	2/3		3/4	
34 x 1,10	1 1/4 x 0,042			K	
41 x 1,30	1 1/2 x 0,050	K	C-TEC	K	C-TEC
54 x 1,60	2 x 0,063	K	C-TEC	K	C-TEC
67 x 1,60	2 5/8 x 0,063	K	C-TEC	K	C-TEC

K = Variable tooth