

LENOX
ALWAYS HUNGRY™



**POWER TOOL
ACCESSORIES
AND HAND TOOLS**

CATALOG 2024

TABLE OF CONTENTS



POWER TOOL ACCESSORIES

RECIPROCATING SAW BLADES	6
PORTABLE BAND SAW BLADES	15
JIG SAW BLADES	16
CUT-OFF WHEELS	18
HOLE SAWS	19
HOLE SAW KITS	22
HOLE SAWS & PILOT DRILL	25
CARBIDE GRIT HOLE SAWS	26
CARBIDE HOLE CUTTERS	27
ARBORS	28
HOLE SAW SELECTION GUIDE	30
STEP DRILL BITS	31
SHIP AUGER BITS	32
UTILITY BITS	33
SELF-FEED BITS	34

HAND TOOLS

HACKSAW BLADES & FRAMES	35
HAND SAWS	38



WHY LENOX

LENOX® brings more than a century of blade production experience to the table resulting in industry-leading blade materials and cutting surface technology. The result—durable, highly effective blades for peak performance in hand tools, power tool accessories, and industrial cutting solutions.



INDUSTRY-WIDE RECOGNITION

AWARDS & ACCOLADES

LENOX® was the first U.S. band saw blade manufacturer to achieve ISO certification. In addition, LENOX® tools have received multiple-year Pro Tool Innovation Awards for Reciprocating, Jigsaw, and Band Saw blades, Aviation Snips, Concrete/Masonry Hole Saws, Screw and Nut Drivers, and Tool Control-Diagnostics Software/Apps.



A HISTORY OF RECIP LEADERSHIP

LENOX® now has over a century of cutting expertise, delivering solutions that make our end users more productive. LENOX defined performance in the reciprocating saw blade category since inventing the first bi-metal blade in 1977. LENOX has continued to lead the way in recip performance and is redefining performance levels in the bi-metal reciprocating category with the introduction of WAVE EDGE™ Saw Blade Technology.

LENOX RECIPROCATING SAW BLADES

- 1977**: Bi-Metal Reciprocating Saw Blades
- 2014**: POWER ARC CURVED BLADE FOR UP TO 2X LIFE
- 2016**: POWER BLAST TECHNOLOGY Built Stronger Cuts Longer
- 2017**: LAZER CT™ DEMOLITION CT™ UP TO 10X LIFE
- 2020**: LAZER CT™ DEMOLITION CT™ UP TO 50X LIFE
- 2022**: UP TO 50% LONGER LIFE WAVE EDGE™ SELECT MODELS

BI-METAL CONSTRUCTION

SPRING STEEL BACKING

HIGH-SPEED CUTTING EDGE

9114R

BI-METAL CONSTRUCTION

SPRING STEEL BACKING

HIGH-SPEED CUTTING EDGE

810R

BI-METAL CONSTRUCTION

SPRING STEEL BACKING

HIGH-SPEED CUTTING EDGE

950R

*The WAVE EDGE claim above only applies to MULTIWOLF™ and select METALWOLF™ and DEMOWOLF™ models vs. prior LENOX generation

LENOX CARBIDE TIPPED RECIPROCATING SAW BLADES

CARBIDE TIPPED FOR THE HIGHEST PERFORMANCE DEMANDING METAL & NAIL-EMBEDDED WOOD APPLICATIONS



LAZER CT™
UP TO 50X LIFE



UP TO 50X LIFE*

High performance carbides are welded to the cutting edge for durability and to help reduce tooth loss

QUICK CUTS IN DEMANDING METAL CUTTING APPLICATIONS

Titanium nitride coating makes teeth more wear-resistant so they stay sharp for quicker cuts

ENGINEERED FOR PERFORMANCE

Each tooth is precision ground to cut through a wide range of metals including steel pipe, cast iron and stainless steel

STRAIGHT CUTS IN LARGE DIAMETER MATERIALS

Tall, thick blade profile designed to add durability and minimize blade breaks to help deliver straight cuts



TPI	LENGTH X WIDTH X THICKNESS		1-PACK	3-PACK	5-PACK	APPLICATION
	IN	MM	PROD NO	PROD NO	PROD NO	
8	6 X 1 X .050	152 X 25 X 1.3	2014220	2058828	2014223	Thick Metal, Medium Metal, Stainless Steel, Fire Rescue
8	9 X 1 X .050	229 X 25 X 1.3	2014224	2058829	2014225	Thick Metal, Medium Metal, Stainless Steel, Fire Rescue
8	12 X 1 X .050	305 X 25 X 1.3	LXAR12108CT-1	—	LXAR12108CT	Thick Metal, Medium Metal, Stainless Steel, Fire Rescue
10	6 X 1 X .050	152 X 25 X 1.3	LXAR6110CT-1	LXAR6110CT-3	LXAR6110CT	Medium Metal, Thick Metal, Non-Ferrous Metal
10	9 X 1 X .050	229 X 25 X 1.3	LXAR9110CT-1	LXAR9110CT-3	LXAR9110CT	Medium Metal, Thick Metal, Non-Ferrous Metal
10	12 X 1 X .050	305 X 25 X 1.3	LXAR12110CT-1	—	LXAR12110CT	Medium Metal, Thick Metal, Non-Ferrous Metal

DEMOLITION CT™



UP TO 50X LIFE**

High performance carbides are welded to the cutting edge for durability and to help reduce tooth loss

ENGINEERED FOR FAST PERFORMANCE

Each tooth is precision ground ideal for cutting through dense wood with nails

STANDS UP TO TOUGH DEMOLITION APPLICATIONS

Tall, thick blade profile designed to add durability and minimize blade breaks

TPI	LENGTH X WIDTH X THICKNESS		1-PACK	3-PACK	5-PACK	APPLICATION
	IN	MM	PROD NO	PROD NO	PROD NO	
6	6 X 1 X .050	152 X 22 X 1.3	1832118	—	1832162	Fast Wood, Demolition, Nail-Embedded Wood
6	9 X 1 X .050	229 X 22 X 1.3	1832143	2059102	1832144	Fast Wood, Demolition, Nail-Embedded Wood
6	12 X 1 X .050	305 X 22 X 1.3	1832146	2058827	1832147	Fast Wood, Demolition, Nail-Embedded Wood

*vs. prior generation 10TPI Standard LENOX® Bi-Metal reciprocating saw blades cutting cast iron and rebar.

**vs. prior generation 6TPI Standard LENOX® Bi-Metal reciprocating saw blades cutting wood with nails



METALWOLF

LENOX® METALWOLF™ WAVE EDGE™ RECIPROCATING SAW BLADES



UP TO 50% LONGER LIFE*

Revolutionary WAVE EDGE™ tooth form design utilizes a 3-stage tooth formation to help improve cutting life

DESIGNED FOR EXTENSIVE METAL APPLICATIONS

Thin blade design is ideal for making quick cuts through a range of metal types and gauges

RELIABLY AGGRESSIVE CUTTING

High-speed steel cutting edge and spring steel backing helps strengthen the blade, reduce breaks, and provides durability for long blade life



*The claim above only applies to METALWOLF™ and select DEMOWOLF™ models vs. prior LENOX® generation



TPI	IN	MM	1-PACK	2-PACK	5-PACK	25-PACK	50-PACK	APPLICATION
10	6 X 1 X .042	152 X 25 X 1.07	-	-	201706110R	20171B6110R	-	Thick Metal
10	9 X 1 X .042	229 X 25 X 1.07	-	24905T9110R	201769110R	20177B9110R	-	Thick Metal
10	12 X 1 X .042	305 X 25 X 1.07	-	-	2018212110R	20183B12110R	-	Thick Metal
14	6 X 1 X .035	152 X 25 X .9	-	-	201726114R	20173B6114R	227640SB6114R	Thick Metal
14	9 X 1 X .035	229 X 25 X .9	-	24906T9114R	201789114R	20179B9114R	227660SB9114R	Thick Metal
14	12 X 1 X .042	305 X 25 X 1.07	-	-	2018412114R	20185B12114R	-	Thick Metal
12/16	9 X 1 X .042	229 X 25 X .9	-	-	-	1954462*	-	Auto Dismantling, Medium & Thick Metal
12/16	12 X 1 X .042	305 X 25 X 1.07	-	-	-	1954463*	-	Auto Dismantling, Medium & Thick Metal
18	6 X 1 X .035	152 X 25 X .9	-	-	201746118R	20175B6118R	227650SB6118R	Medium Metal
18	9 X 1 X .035	229 X 25 X .9	-	24907T9118R	201809118R	20181B9118R	227670SB9118R	Medium Metal
18	12 X 1 X .042	305 X 25 X 1.07	-	-	2019012118R	20191B12118R	-	Medium Metal
14	4 X 3/4 X .035	102 X 19 X .9	-	-	20550414R	-	227600SB414R	Thick Metal
14	6 X 3/4 X .035	152 X 19 X .9	20565S614R	-	20564614R	20494B614R	227560SB614R	Thick Metal
14	8 X 3/4 X .035	203 X 19 X .9	-	-	21519814R	1855567	1855570	Thick Metal
14	9 X 3/4 X .050	229 X 19 X 1.3	-	205119514R	-	-	-	Thick Metal
10	6 X 3/4 X .035	152 X 19 X .9	20561S610R	-	20562610R	20493B610R	227610SB610R	Wood, Metal, Plastic
10	8 X 3/4 X .050	203 X 19 X 1.3	20581S810R	-	20580810R	20590B810R	227530SB810R	Wood, Metal, Plastic
10/14	6 X 3/4 X .050	152 X 19 X 1.3	-	20592650R	20374650R5	20515B650R	-	Fire Rescue, Wood, Metal, Plastic
10/14	8 X 3/4 X .050	203 X 19 X 1.3	-	-	20577850R	20535B850R	-	Fire Rescue, Wood, Metal, Plastic
10/14	12 X 3/4 X .050	305 X 19 X 1.3	20584S110R	-	20583110R	20491B110R	227580SB110R	Wood, Metal, Plastic
18	4 X 3/4 X .035	102 X 19 X .9	20553S418R	-	20552418R	20489B418R	227590SB418R	Medium Metal
18	6 X 3/4 X .035	152 X 19 X .9	20567S618R	-	20566618R	20529B618R	227510SB618R	Medium Metal
18	8 X 3/4 X .035	203 X 19 X .9	20563S818R	-	20578818R	20487B818R	227540SB818R	Medium Metal
18	12 X 3/4 X .035	12 X 19 X .9	-	-	21510118R	21511B118R	-	Medium Metal
18	3-5/8 X 5/16 X .035	92 X 8 X .9	-	-	20521318RC	-	-	Contour Metal
24	6 X 3/4 X .035	152 X 19 X .9	20569S624R	-	20568624R	20496B624R	227570SB624R	Thin Metal
24	8 X 3/4 X .035	203 X 19 X .9	-	-	20579824R	-	-	Thin Metal

*Blades do not feature Wave Edge technology.



MULTIWOLF

LENOX® MULTIWOLF™ WAVE EDGE™ RECIPROCATING SAW BLADES



UP TO 50% LONGER LIFE*

Revolutionary WAVE EDGE™ tooth form design utilizes a 3-stage tooth formation to help improve cutting life

CUT THROUGH A WIDE VARIETY OF MATERIALS

Designed for making quick, clean cuts in metal, wood, and plastic

RELIABLY AGGRESSIVE CUTTING

High-speed steel cutting edge and spring steel backing helps strengthen the blade, reduce breakage, and provides durability for long blade life



*The claim above only applies to MULTIWOLF™ and select METALWOLF™ and DEMOWOLF™ models vs. prior LENOX® generation

TPI	IN	MM	1-PACK	2-PACK	5-PACK	25-PACK	50-PACK	APPLICATION
10	6 X 3/4 X .035	152 X 19 X .9	20561S610R	-	20562610R	20493B610R	227610SB610R	Wood, Metal, Plastic
10	8 X 3/4 X .050	203 X 19 X 1.3	20581S810R	-	20580810R	20590B810R	227530SB810R	Wood, Metal, Plastic
10/14	12 X 3/4 X .050	305 X 19 X 1.3	20584S110R	-	20583110R	20491B110R	227580SB110R	Wood, Metal, Plastic
10/14	6 X 3/4 X .050	152 X 19 X 1.3	-	20592650R	20374650R5	20515B650R	-	Fire Rescue, Wood, Metal, Plastic
10/14	8 X 3/4 X .050	203 X 19 X 1.3	-	-	20577850R	20535B850R	-	Fire Rescue, Wood, Metal, Plastic



LENOX® DEMOWOLF™ RECIPROCATING SAW BLADES



OPTIMIZED TO PERFORM CUT AFTER CUT

Tall, thick blade profile designed to add durability and minimize blade breaks to deliver the endurance needed for rigorous demolition application

PLUNGE CUT WITH EASE

Blade tip designed for easy, quick, and clean plunge cutting



RELIABLY AGGRESSIVE CUTTING

High-speed steel cutting edge and spring steel backing helps strengthen the blade, reduce breaks, and provides durability for long blade life



*The claim above only applies to DEMOWOLF™ models 950R & 1250R – vs. prior LENOX® generation.

TPI	IN	MM	1-PACK	5-PACK	25-PACK	50-PACK	WAVE EDGE	RAPID PLUNGE	APPLICATION
6	6 X 1 X .062	152 X 25 X 1.6	205126066R	203706066R5	20514B6066R	-	-	**	Demolition, Nail-Embedded Wood
6	9 X 1 X .062	229 X 25 X 1.6	20598966R	20371966R5	20523B966R	227630SB966R	-	**	Demolition, Nail-Embedded Wood
6	12 X 1 X .062	305 X 25 X 1.6	20500106R	20373106R5	20485B106R	-	-	**	Demolition, Nail-Embedded Wood
10	9 X 1 X .050	229 X 25 X 1.3	-	LXAR950R	LXARB950R	-	*	-	Demolition, Wood, Metal, Plastic
10	12 X 1 X .050	305 X 25 X 1.3	-	LXAR1250R	LXARB1250R	-	*	-	Demolition, Wood, Metal, Plastic
10	9 X 1 X .062	229 X 25 X 1.6	20597960R	20372960R5	20524B960R	227620SB960R	-	-	Demolition, Fire and Rescue

*Only applies to 950R & 1250R **Excludes DEMOWOLF BLADES 950R, 1250R, 960R

LENOX® LUMBERWOLF™ RECIPROCATING SAW BLADES

CUT THROUGH WOOD WITH NAILS WITH EASE

Blade thickness and profile are ideal for cutting through dense wood with nails

PLUNGE CUT WITH EASE

Blade tip designed for easy, quick, and clean plunge cutting

RELIABLY AGGRESSIVE CUTTING

High-speed steel cutting edge and spring steel backing helps strengthen the blade, reduce breaks, and provides durability for long blade life



**For LENOX blades with this feature, refer to product packaging or go to www.lenoxtools.com
Applies to LUMBERWOLF™ blade models except for 634R and 676RC.



TPI	LENGTH X WIDTH X THICKNESS		1-PACK	5-PACK	25-PACK	50-PACK	RAPID PLUNGE	APPLICATION
	IN	MM	PROD NO	PROD NO	PROD NO	PROD NO		
4	4 X 3/4 X .050	102 X 19 X 1.3	20574S634R	20575634R	-	-	-	Fast Wood
6	6 X 7/16 X .050	152 X 11 X 1.3	-	20556676RC	-	-	-	Nail-Embedded Wood
6	6 X 3/4 X .050	152 X 19 X 1.3	20573S656R	20572656R	20530B656R	227500SB656R	**	Nail-Embedded Wood
6	9 X 3/4 X .050	229 X 19 X 1.3	20587S956R	20582956R	20558B956R	227520SB956R	**	Nail-Embedded Wood
6	12 X 3/4 X .050	305 X 19 X 1.3	20586S156R	20585156R	20495B156R	227550SB156R	**	Nail-Embedded Wood

BI-METAL CONSTRUCTION

Durable and flexible to survive nail strikes

FLEAM GROUND TOOTH FORM

Fast, clean wood cutting



IDEAL FOR CLEAN WOOD, PLASTIC PIPE AND TREE PRUNING

TPI	LENGTH X WIDTH X THICKNESS		5-PACK	APPLICATION
	IN	MM	PROD NO	
6	6 X 3/4 X .050	152 X 19 X 1.3	121016W6R	Clean Wood, Plastics, Pruni
6	8 X 3/4 X .050	229 X 19 X 1.3	121029W6R	Clean Wood, Plastics, Pruni
6	6 X 3/4 X .050	152 X 19 X 1.3	20570636RP*	Drywall/Plaste

*Blade does not have fleam ground toothform

LENOX DIAMOND™ & CARBIDE GRIT RECIPROCATING SAW BLADES

LASTS LONGER

Nickel alloy-brazed lab-made diamond particles maintain sharpness to keep cutting after conventional carbide grit blades fail

STRAIGHT, CLEAN CUTS

Unlike bulky snap cutters which crush pipes and leave ragged, uneven cuts, LENOX DIAMOND™ cuts clean. Durable chrome alloy backing steel provides extra stability

IN	LENGTH X WIDTH X THICKNESS		1-PACK	APPLICATION
	MM	PROD NO	PROD NO	
8 X 3/4 X .040	203 X 19 X 1.00	10833800RDG	10833800RDG	Cast Iron, Tile, Brick and Natural Sto
9 X 3/4 X .042	225 X 19 X 1.07	1766338	1766338	Cast Iron, Tile, Brick and Natural Sto
11 X 3/4 X .042	275 X 19 X 1.07	1766356	1766356	Cast Iron, Tile, Brick and Natural Sto



HIGH PERFORMANCE IN ABRASIVE MATERIALS

Cuts through tough materials that resist chip-forming, including ceramics, pipe, man-made stone, brick, marble and more

SMOOTH, QUICK CUTS

Uniformly applied, durable carbide grit particles on a flexible blade provide quicker cuts without snagging or binding

IN	LENGTH X WIDTH X THICKNESS		1-PACK	GRIT	APPLICATION
	MM	PROD NO	PROD NO		
6 X 3/4 X .032	152 X 19 X .8	20505600RG	20505600RG	MEDIUM	Fiberglass, Ceramic, Tile, Cultured Marble, Clays, Bri
8 X 3/4 X .040	203 X 19 X 1	20576800RG	20576800RG	MEDIUM	Fiberglass, Ceramic, Tile, Cultured Marble, Clays, Bri
10 X 3/4 X .050	254 X 19 X 1.3	20506100RG	20506100RG	MEDIUM	Fiberglass, Ceramic, Tile, Cultured Marble, Clays, Bri

†This blade uses manufactured nickel alloy-brazed lab-made diamond particles engineered for cutting



RECIPROCATING SAW BLADE KITS



LXRART5SET 5 PIECE

CARBIDE TIPPED
RECIP KIT

Includes Storage Case

QTY	PROD NO	TPI	LENGTH X WIDTH X THICKNESS		APPLICATION
			IN	MM	
1	656RCT	6	6 X 1 X .050	152 X 25 X 1.3	
1	6108RCT	8	6 X 1 X .050	152 X 25 X 1.3	
1	6110RCT	10	6 X 1 X .050	152 X 25 X 1.3	
1	956RCT	6	9 X 1 X .050	229 X 25 X 1.3	
1	9108RCT	8	9 X 1 X .050	229 X 25 X 1.3	

1214412RKD 12 PIECE

DEMOLITION KIT

Includes Storage Case

QTY	PROD NO	TPI	LENGTH X WIDTH X THICKNESS		APPLICATION	WAVE EDGE	RAPID PLUNGE
			IN	MM			
3	6066R	6	6 X 1 X .062	150 X 22 X 1.6		-	X
3	6114R	14	6 X 1 X .035	150 X 25 X .9		X	-
2	9114R	14	9 X 1 X .035	229 X 25 X .9		X	-
2	966R	6	9 X 1 X .062	229 X 22 X 1.6		-	X
2	960R	10	9 X 1 X .062	229 X 22 X 1.6		-	-



121439KPE 9 PIECE

GENERAL
PURPOSE KIT

Includes Storage Case

QTY	PROD NO	TPI	LENGTH X WIDTH X THICKNESS		APPLICATION	WAVE EDGE	RAPID PLUNGE
			IN	MM			
2	656R	6	6 X 3/4 X .050	152 X 19 X 1.3		-	X
2	624R	24	6 X 3/4 X .035	152 X 19 X .9		X	-
2	818R	18	8 X 3/4 X .035	203 X 19 X .9		X	-
2	810R	10	8 X 3/4 X .050	203 X 19 X 1.3		X	-
1	960R	10	9 X 1 X .062	229 X 22 X 1.6		-	-

1073415RK6 15 PIECE

GENERAL PURPOSE KIT

Includes Storage Case

QTY	PROD NO	TPI	LENGTH X WIDTH X THICKNESS		APPLICATION	WAVE EDGE	RAPID PLUNGE
			IN	MM			
5	614R	14	6 X 3/4 X .035	152 X 19 X .9		X	-
5	618R	18	6 X 3/4 X .035	152 X 19 X .9		X	-
5	656R	6	6 X 3/4 X .050	152 X 19 X 1.3		-	X



1839465 5 PIECE

DEMOLITION KIT

QTY	PROD NO	TPI	LENGTH X WIDTH X THICKNESS		APPLICATION	WAVE EDGE	RAPID PLUNGE
			IN	MM			
1	6066R	6	6 X 1 X .062	150 X 25 X 1.6		-	X
1	6114R	14	6 X 1 X .035	150 X 25 X .9		X	-
1	9114R	14	9 X 1 X .035	229 X 25 X .9		X	-
1	966R	6	9 X 1 X .062	229 X 25 X 1.6		-	X
1	960R	10	9 X 1 X .062	229 X 25 X 1.6		-	-

*Speed measured cutting 4" cast iron pipe at maximum speed vs. the leading competitor.



RECIPROCATING SAW BLADE SELECTION GUIDE

	NON-FERROUS METAL	THIN METAL	MEDIUM METAL	THICK METAL	STAINLESS STEEL	PLASTICS & COMPOSITES	WOOD	NAIL-EMBEDDED WOOD	DEMOLITION	FIRE & RESCUE	DRYWALL/PLASTER	CAST IRON	TILE & GRANITE	ABRASIVES
BEST	LENOX CURVED & COATED		CARBIDE LAZER CT™		LENOX COATED & CURVED	LENOX CURVED & COATED	CARBIDE LAZER CT™		SPECIALTY	CARBIDE LAZER CT™	CARBIDE LAZER CT™			
BETTER	WAVE EDGE™ METALWOLF™		LENOX CURVED & COATED		WAVE EDGE™ METALWOLF™	WAVE EDGE™ LUMBERWOLF™	LENOX CURVED & COATED		—	DIAMOND™ GRIT				
GOOD	—		WAVE EDGE™ METALWOLF™		—	WAVE EDGE™ LUMBERWOLF™	WAVE EDGE™ DEMOWOLF™		—	CARBIDE GRIT				


†Nickel alloy-brazed lab-made diamond particles

TEETH PER INCH SELECTION GUIDE

6 TPI	8 TPI	10 TPI	10/14 TPI	14 TPI	12/16 TPI	18 TPI	24 TPI	GRIT
ROUGH			CUT QUALITY					SMOOTH
FAST			CUT SPEED					SLOW
WOOD				THICK METAL 1/8"–1/2" (3.2–12.7 mm)			MEDIUM METAL 3/32"–5/16" (2.4–7.9 mm)	
							THIN METAL <1/8" (<3.2 mm)	
								ABRASIVES

BLADE LENGTH SELECTION GUIDE

- 4" (102 mm)
- 6" (152 mm)
- 8" (203 mm)
- 9" (229 mm)
- 10" (254 mm)
- 12" (305 mm)

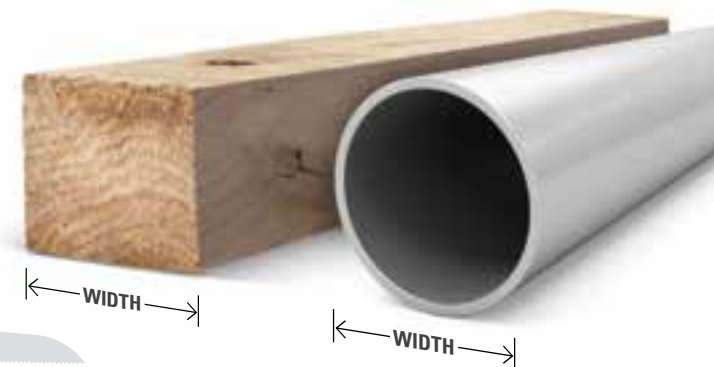

WIDTH OF MATERIAL + 3" (76 mm) = BLADE LENGTH

Example: 5" (width) + 3" (76 mm) = 8" (203 mm).

Use an 8" (203 mm) or 9" (229 mm) blade

TIP

Always keep 2-3 teeth in the material at all times

RECIPROCATING SAW BLADE CROSS REFERENCE CHART

TPI	LENGTH		PROD NO	SHAPE	MILWAUKEE®	DIABLO®	MK MORSE®
	IN	MM					
LAZER CT™	8	6	152	6108RCT	5201, 5301, 5501	DS0608CF, DS0608CF3, DS0608CF10	CTR608MC1, CTR608MC5, CTR608MC15
	8	9	229	9108RCT	5202, 5302, 5502	DS0908CF, DS0908CF3, DS0908CF10	CTR908MC1, CTR908MC5, CTR908MC15
	8	12	305	12108RCT	—	DS1208CF, DS1208CF3, DS1208CF10	CTR1208MC1, CTR1208MC5, CTR1208MC15
	10	6	152	6110RCT	—	DS0610CF, DS0610CF3, DS0610CF10	—
	10	9	229	9110RCT	—	DS0910CF, DS0910CF3, DS0910CF10	—
	10	12	229	12110RCT	—	DS01210CF, DS1210CF3, DS1210CF10	—
DEMOLITION CT™	6	6	152	656RCT	5221, 5202, 5302, 5502	DS0606CWS, DS0606CWS3, DS0606CWS10	—
	6	9	229	956RCT	5226	DS0906CWS, DS0906CWS3, DS0906CWS10	—
	6	12	305	156RCT	5227	DS1206CWS, DS1206CWS3, DS1206CWS10	—
	6	6	152	6066R	5021, 8021	DS0614BGP5	—
	6	9	229	966R	5026	—	—
	6	12	305	106R	5027	—	—
10	9	229	960R	—	—	—	RBR962811T03, RB96210T03



*Blades do not feature Power Arc® technology.

Milwaukee is a registered trademark of Milwaukee Electric Tool Corp., which has not endorsed or approved this comparison.



TPI	LENGTH		PROD NO	SHAPE	MILWAUKEE®	DIABLO®	MK MORSE®
	IN	MM					
10	6	152	6110R		4172, 5712	DS0608BF05, DS0608CF3	—
10	9	229	9110R		4713, 5713	DS0908BF02, DS0908BF05, DS0908BF025	RB1010T05
10	12	305	12110R		5714	—	RBSA121014T05, RB1210T05
14	6	152	6114R		4782	DS0414BF5, DS0614BF2, DS0614BF5, DS0614BF25	RBPB65014T05, RBAE61115T05, RBAE6501115T05
14	9	229	9114R		4787, 5787	DS0914BF5	RBPB125014T05, RBAE91115T05, RBAE9501115T05
14	12	305	12114R		5794	DS1214BF5	RBAE121115T05, RBAE12501115T05, RBPB125014T05
14	3-5/8	92	314RC		5161, 5162	—	—
14	4	102	414R		5181	—	RB414T05
14	6	152	614R		5182, 4182,	—	RB65014T05, RB64214T05, RBWP64214T05, RB614T05
14	8	203	814R		5187, 4182, 7187	—	RB814, RBMC814
14	9	225	9514R		—	—	RBWP94214T05
12/16	9	229	9126R		—	—	—
12/16	12	305	12126R		—	—	—
18	6	152	6118R		4784, 5784	—	RB65018T05, RBAE61521T05, RBAE6501521T05
18	9	229	9118R		4788, 5790, 5788	—	RBSA818T05, RBAE91521T05, RBAE9501521T05
18	12	305	12118R		4789, 5791, 8789, 5789	—	RBSA1218T05, RBAE121521T05, RBAE12501521T05
18	3-5/8	92	318RC		5163	—	RB318ST05, RB318ST50
18	4	102	418R		5183	—	—
18	6	152	618R		4184, 5184	—	RB64218T05, RB618T05, RBWP64218T05
18	8	203	818R		4188, 5188	—	RB94218T05, RB918T05, RB818T05
18	12	305	118R		5189	—	RB124218T05, RB1018T05, RB1218T05
24	6	152	624R		4186, 5186, 8186	—	RB64224T05, RB624T05
24	8	203	824R		—	DS0920BF2, DS0920BF5, DS0920BF25	—
10	6	152	610R		5090, 5091, 4091, 5092	—	RBWP64210T05, RB610T05
10	8	203	810R		4093, 5093	DS0914BGP2, DS-0914BGP5, DS0914BGP25	RBWP94210T05, RB810T05
10/14	6	152	650R		—	—	RB41014T05, RB61014T05, RB6501014T05, RB6501014TT05
10/14	8	203	850R		5193	DS0914AFC2, DS0914AFC5	RB81014C2, RB850812T05, RB81014T05, RB8501014T05
10/14	12	305	110R		5094, 5194	DS1214AFC5	RB125010T05, RB12551014T05, RB121014T05, RB12501014STT05
4	6	152	634R		—	—	—
6	6	152	656R		5035	DS0612BW2, DS0612BW5, DS0612BW25	RB63506T05, RB65006T05, RB65058T05
6	6	152	676RC		1606, 5041	—	RB65006CT05, RB65006CT50
6	9	229	956R		5016, 5036	DS0912BW2, DS0912BW5, DS0912BW25	RB95006C2, RB93506T05, RB95006T05
6	12	305	156R		5017, 5037	DS1212BW2, DS1212BW5, DS1212BW25	RB123506T05, RB125006T05
6	6	152	6W6R		1301, 1303, 1304, 1305, 7015, 7016	—	—
6	9	229	9W6R		—	DS0905FG, DS0905FG5, DS1205FG, DS1205FG5	—
6	6	152	636RP		—	—	RB65006PT05
GRIT	9	225	800DGDG		1450	DS0930DGX	RB0930C
GRIT	11	275	100DGDG		—	—	—
Grit	6	152	600RG		1421, 6430, 1420	—	RTCG6
Grit	8	203	800RG		1431, 6430, 1430	—	RTCG8
Grit	10	254	100RG		—	—	—

Diablo is a registered trademark of Freud America, Inc., which has not endorsed or approved this comparison.
The M.K. Morse Company has not endorsed or approved this comparison.

MASTER-BAND™ BLADES

MAXIMUM PERFORMANCE FOR PORTABLE BAND SAWS

ENHANCED BEAM STRENGTH

Specially treated bands of .023 and .025 thicknesses offer increased blade strength, reducing deflection and twisting of blades

SHATTER RESISTANT

Bi-Metal blades are designed to bend and resist breaking and extend blade life

LONG LASTING

LENOX TUFF TOOTH® design reinforces tooth for long blade life



TPI	LENGTH X WIDTH X THICKNESS		EDGE MATERIAL	3-PACK PROD NO	25-PACK PROD NO	APPLICATION
	IN	MM				
10/14	44-7/8 x 1/2 x .023	1140 x 12.7 x .6	Matrix	8011438EW1014	9403B38EW1014	1/4" & larger, most metals
14	44-7/8 x 1/2 x .023	1140 x 12.7 x .6	Matrix	8011538EW14	9404B38EW14	3/16" - 3/8," most metals
14/18	44-7/8 x 1/2 x .023	1140 x 12.7 x .6	Matrix	8011238EW1418	9407B38EW1418	1/8" - 5/16," most metals
18	44-7/8 x 1/2 x .023	1140 x 12.7 x .6	Matrix	8011638EW18	9405B38EW18	3/32" - 1/4," most metals
24	44-7/8 x 1/2 x .023	1140 x 12.7 x .6	Matrix	8011738EW24	—	up to 1/8," most metals
10/14	44-7/8 x 1/2 x .025	1140 x 12.7 x .6	M42	80144385EW1014	9399B385EW1014	1/4" & larger, metals, including stainless steel
14	44-7/8 x 1/2 x .025	1140 x 12.7 x .6	M42	80145385EW14	—	3/16" - 3/8," metals, including stainless steel
14/18	44-7/8 x 1/2 x .025	1140 x 12.7 x .6	M42	80142385EW1418	9401B385EW1418	1/8" - 5/16," metals, including stainless steel
18	44-7/8 x 1/2 x .025	1140 x 12.7 x .6	M42	82310385EW18	9402B385EW18	3/32" - 1/4," metals, including stainless steel

WOLF-BAND® BLADES

PROFESSIONAL PERFORMANCE AND EXCEPTIONAL VALUE

LONG LASTING

High speed steel teeth provide a strong, long lasting cutting edge

SHATTER RESISTANT

Bi-Metal blades bend and resist breaking and extend blade life

EXCEPTIONAL VALUE

Professional performance and competitive pricing provide extraordinary cost-per-cut value



TPI	LENGTH X WIDTH X THICKNESS		3-PACK PROD NO	5-PACK PROD NO	25-PACK PROD NO	APPLICATION
	IN	MM				
10/14	44-7/8 X 1/2 X .020	1140 X 12.7 X .5	—	8009838PW10145	3842338PW1014	1/4" (6 mm) & LARGER
14	44-7/8 X 1/2 X .020	1140 X 12.7 X .5	1208638PW143	8010738PW145	3842438PW14	3/16" (5 mm) - 3/8" (10 mm)
14/18	44-7/8 X 1/2 X .020	1140 X 12.7 X .5	—	8009938PW14185	3842738PW1418	1/8" (3.2 mm) - 5/16"
18	44-7/8 X 1/2 X .020	1140 X 12.7 X .5	1208838PW183	8010838PW185	3842538PW18	3/32" (2 mm) - 1/4" (6 mm)
24	44-7/8 X 1/2 X .020	1140 X 12.7 X .5	1208938PW243	8010938PW245	3842638PW24	UP TO 1/8" (3.2 mm)
COMPACT PORTABLE BAND SAW BLADES						
10/14	35-3/8 X 1/2 X .020	900 X 13 X .50	—	1786673	1786678	1/4" (6 mm) & LARGER
14	35-3/8 X 1/2 X .020	900 X 13 X .50	—	1786674	—	3/16" (5 mm) - 3/8" (10 mm)
18	35-3/8 X 1/2 X .020	900 X 13 X .50	—	1786675	1786680	3/32" (2 mm) - 1/4" (6 mm)
24	35-3/8 X 1/2 X .020	900 X 13 X .50	—	1786676	—	UP TO 1/8" (3.2 mm)
SUB-COMPACT PORTABLE BAND SAW BLADES						
18	27-1/4 X 1/2 X .020	692.15 X 12.7 X .50	1910012*	*AVAILABLE IN 10 PACK ONLY		3/32" (2 mm) - 1/4" (6 mm)
18	27 X 1/2 X .020	685.8 X 13 X .50	LXAPB27183	—	—	3/32" (2 mm) - 1/4" (6 mm)

JIG SAW BLADES

EFFICIENT CUTTING FOR
A RANGE OF METAL, WOOD AND GENERAL APPLICATIONS

ADVANCED PERFORMANCE IN METAL CUTTING APPLICATIONS

OPTIMIZED FOR CLEAN CUTS IN SOFT WOOD,
HARD WOOD, AND COMPOSITE

GENERAL PURPOSE - DESIGNED FOR WOOD,
METAL, AND PLASTIC APPLICATIONS



MATERIALS	PRODUCT CODE	LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)	TPI	APPLICATION
1994458	C450T	101.6	1.5	7.9	10	Wood 4.8 mm – 31.8 mm
	C416T	101.6	1.5	7.9	6	Wood, Fast Cut 6.4 mm – 50.8 mm
	C320TS	88.9	1.5	5.6	20	Wood, Scroll Cut 1.6 mm – 15.9 mm
	B314T	92.2	0.9	9.5	14	Metal >2.4 mm
	B324T	92.2	0.9	9.5	24	Metal <3.2 mm
1994456-KR	C450T	101.6	1.5	7.9	10	Wood 4.8 mm – 31.8 mm
	C416T	101.6	1.5	7.9	6	Wood, Fast Cut 6.4 mm – 50.8 mm
	C320TS	88.9	1.5	5.6	20	Wood, Scroll Cut 1.6 mm – 15.9 mm
	B314T	92.2	0.9	9.5	14	Metal >2.4 mm
	B324T	92.2	0.9	9.5	24	Metal <3.2 mm

APPLICATION ICON INSTRUCTION



TEETH PER INCH SELECTION GUIDE

6 TPI	10 TPI	12 TPI	14 TPI	18 TPI	24 TPI	32 TPI	GRIT
ROUGH ←		CUT QUALITY				→ SMOOTH	
FAST ←		CUT SPEED				→ SLOW	
WOOD 1/16" – 4" (1.6 mm – 101.6 mm)							
GENERAL PURPOSE 5/16" – 3-1/2" (7.9 mm – 88.9 mm)			MEDIUM METAL 1/16" – 1/4" (1.6 mm – 6.4 mm)				
THICK METAL > 3/32" (2.4 mm)				THIN METAL < 1/8" (3.2 mm)		ABRASIVES	
EXTRA THIN METAL < 1/16" (1.6 mm)							



MATERIALS	PRODUCT CODE	LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)	TPI	APPLICATION
LXKRB314T5	B314T5	92.2	9.5	0.9	14T	Metal >2.4 mm
LXKRB318T5	B318T5	92.2	9.5	0.9	18T	Metal 1.6 mm – 6.4 mm
LXKRB324T5	B324T5	92.2	9.5	0.9	24T	Metal <3.2 mm
LXKRB456T5	B456T5	99.3	7.6	1.57	6T	Wood 9.5 mm – 44.5 mm
LXKRB450T5	B450T5	99.3	7.6	1.57	10T	Wood 4.8 mm – 31.8 mm
LXKRB408T5	B408T5	101.6	9.5	1.3	8T	Aluminium 4.8 mm – 15.9 mm
LXKRB406T5	B406T5	101.6	9.5	1.3	6T	Wood 4.8 mm – 31.8 mm
LXKRB512XT5	B512XT5	114.3	9.5	1.5	12T	Wood, Clean Cut 3.2 mm – 50.8 mm
LXKRB482T5	B482T5	114.3	9.5	1.5	10T	Wood 3.2 mm – 57.2 mm
LXKRB514T5	B514T5	133.4	9.5	0.9	14T	>2.4 mm Metal – ≤75 mm Pipe
LXKRB524T5	B524T5	133.4	9.5	0.9	24T	<3.2 mm Metal – ≤13 mm Pipe
LXKRB680T5	B680T5	133.4	9.5	1.3	10T	Multi purpose ≤89 mm
LXKRB714T5	B714T5	180	8	1.3	14T	Sandwich Materials >2.4 mm
LXKRB314TC5	B314TC5	92.2	9.5	0.9	14T	Metal >2.4 mm
LXKRB318TC5	B318TC5	92.2	9.5	0.9	18T	Metal 1.6 mm – 6.4 mm
LXKRB324TC5	B324TC5	92.2	9.5	0.9	24T	Metal <3.2 mm
LXKRC320TS5	C320TS5	81.5	5.4	1.3	20T	Wood, Scroll Cut 1.6 mm – 15.9 mm
LXKRC456T5	C456T5	99.3	7.6	1.57	6T	Wood 9.5 mm – 44.5 mm
LXKRC450T5	C450T5	99.3	7.6	1.57	10T	Wood 4.8 mm – 31.8 mm
LXKRC450DT5	C450DT5	99.3	7.6	1.57	10T	Wood, Reverse Teeth 4.8 mm – 31.8 mm
LXKRC416T5	C416T5	99.3	7.6	1.57	6T	Wood, Fast Cut 6.4 mm – 50.8 mm
LXKRC616T5	C616T5	152	8	1.3	6T	Wood 7.9 mm – 44.5 mm
LXKRDG300T1	DG300T1	88.9	9.5	0.81	Grit	Granite, Porcelain 1.2 mm – 15.9 mm
LXKRG300T1	G300T1	88.9	9.5	0.81	Grit	Ceramic Tile, Fiberglass 1.2 mm – 15.9 mm
LXKRCS318T1	CS318T1	82.6	9.5	1	18T	Stainless Steel 2 mm – 4.8 mm
LXKRCT456T1	CT456T1	101.6	7.9	1.3	6T	Cement, Fiberglass 6.4 mm – 60.3 mm

LENOX METALMAX® CUT-OFF WHEELS

A NEW ALTERNATIVE TO ABRASIVE CUT-OFF WHEELS

1,000+ CUTS

METALMAX® delivers 1,000 or more cuts with no need for wheel changes.*

LONG LIFE

Diamond† technology provides extreme durability in metal cutting applications, leading to fewer wheel changes, when compared to thin bonded cut-off wheels.

PRECISION AND REACH

METALMAX® is designed to maintain a consistent cutting depth through the duration of its life, unlike a bonded abrasive wheel.



1000+ CUTS

LENOX METALMAX® wheels deliver 1,000 or more cuts with no need for wheel changes. That is 30 times longer life than thin bonded cut-off wheels.

*Average performance in 1" carbon steel square tube
†This blade uses manufactured diamonds engineered for cutting



LENOX METALMAX™ RANGE - TYPE 1 CUT-OFF WHEELS

PRODUCT DIMENSIONS

PROD NO	DIAMETER	THICKNESS	ARBOR	OPTIONAL ARBOR ADJUSTMENT	POWER TOOL TYPE	RPM MAX
1972914	1.5"	.050"	3/8"	1/4"	Die Grinder	40200
1972917	2"	.050"	3/8"	1/4"	Die Grinder	30500
1972918	3"	.050"	3/8"	1/4"	Die Grinder	20300
1972919	4"	.050"	3/8"	1/4"	Die Grinder	15200
1972920	4"	.050"	5/8"	1/4"	Angle Grinder	15200
1972921	4.5"	.050"	7/8"	—	Angle Grinder	13200
1972922	5"	.050"	7/8"	—	Angle Grinder	12200
1972923	6"	.050"	7/8"	Diamond Knock Out	Angle Grinder/Circular Saw	10100
1972924	7"	.060"	7/8"	Diamond Knock Out	Angle Grinder/Circular Saw	8400
1972925	8"	.060"	5/8"	Diamond Knock Out	Circular Saw	7600
1972926	10"	.100"	5/8"	—	Stationary/Small Chop Saw	4300
1972927	12"	.130"	1"	—	Chop Saw	4300
1972929	14"	.130"	1"	—	Chop Saw	4300

LENOX METALMAX™ RANGE - TYPE 27 CUT-OFF WHEELS

PRODUCT DIMENSIONS

PROD NO	DIAMETER	THICKNESS	ARBOR	POWER TOOL TYPE	RPM MAX
2044467	4.5"	.050"	7/8"	Angle Grinder	13200
2044470	6"	.050"	7/8"	Angle Grinder	10100
2044481	7"	.060"	7/8"	Angle Grinder	8400

ONE WHEEL, MULTIPLE MATERIALS

LENOX METALMAX® is recommended for multiple types of metal including steel, sheet metal, stainless steel, rebar, cast iron, aluminum** and non-ferrous metals.



**When cutting Aluminum, it is recommended to use LENOX LUBE® (68020LNx) or some form of saw lubricant to avoid chip welding.

MULTI-MATERIAL CARBIDE TIPPED HOLE SAWS

FOR FAST, ROUGH-IN DRILLING IN CLEAN WOOD, NAIL-EMBEDDED WOOD, CONCRETE BLOCK, FIBER CEMENT, AND BRICK

UP TO 6X FASTER*

Large carbides and aggressive tooth design cuts through material faster for rough-in applications*

RIPS THROUGH NAILS**

High performance carbides are brazed to the cutting edge for durability and to help prevent tooth loss when hitting nails or drilling through abrasive materials

VERSATILE DESIGN

Carbide teeth are optimized to cut through a variety of materials including Nail-Embedded Wood, Concrete Block, Fiber Cement, and Brick




*vs LENOX® Bi-metal Hole Saw Cutting 2" Thick Pressure-Treated Wood
**Based on 2-9/16" Hole Saw Cutting Nail-Embedded Wood


1 PER PACK	DIAMETER		CUTTING DEPTH		APPLICATION	USE ARBOR	
	IN	MM	IN	MM		SNAP-BACK™	STANDARD
LXAH4138	1 3/8	35	2.45	62	1" Supply Lines, <1" Pipe & Fitting	2L, 6L	2L, 3L, OR 6L
LXAH4134	1 3/4	44	2.45	62	Insulated Supply Lines, 1" Pipe & Fitting	2L, 6L	2L, 3L, 6L, OR 7L
LXAH4218	2 1/8	54	2.45	62	1 1/2" Pipe	2L, 6L	2L, 3L, 6L, OR 7L
LXAH42141	2 1/4	57	2.45	62	1-1/2" Pipe & Fitting	2L, 6L	2L, 3L, 6L, OR 7L
LXAH429162	2 9/16	65	2.45	62	2" Pipe	2L, 6L	2L, 3L, 6L, OR 7L
LXAH42342	2 3/4	70	2.45	62	2" Pipe & Fitting	2L, 6L	2L, 3L, 6L, OR 7L
LXAH431	3	76	2.45	62	2-1/2" Pipe	2L, 6L	2L, 3L, 6L, OR 7L
LXAH4358	3 5/8	92	2.45	62	3" Pipe	2L, 6L	2L, 3L, 6L, OR 7L
LXAH44	4	102	2.45	62	3" Pipe & Fitting, Dryer Vent	2L, 6L	2L, 3L, 6L, OR 7L
LXAH4414	4 1/4	108	2.45	62	4" Duct Pipe & Bendable Duct Pipe	2L, 6L	2L, 3L, 6L, OR 7L
LXAH4458	4 5/8	117	2.45	62	4" Pipe	2L, 6L	2L, 3L, 6L, OR 7L
LXAH4614	6 1/4	159	2.45	62	6" Duct Pipe	2L, 6L	2L, 3L, 6L, OR 7L

MULTI-MATERIAL HOLE SAW ARBOR & PILOT BITS

PROD NO	DESCRIPTION	SIZES		SHANK SIZE	
		IN	MM	IN	MM
LXAH9123PBM	2L Multi-Material SNAP-BACK™	1-1/4-6-1/4	31.8-158.8	1/2 & Larger	12.7 & Larger



PROD NO	DESCRIPTION	CHUCK SIZE		FITS ARBOR	
		IN	MM	SNAP-BACK™	SOLID HEX
LXAH93341PB	3-3/4" Multi-Material Pilot (1 pack)	1/4	6.4	2L, 5L, 6L	1L, 2L, 3L, 4L, 5L, 6L, 7L
LXAH93342PB	3-3/4" Self-Feed Pilot (1 pack)	1/4	6.4	2L, 5L, 6L	1L, 2L, 3L, 4L, 5L, 6L, 7L

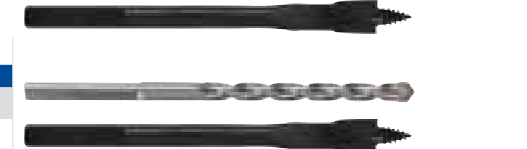

MULTI-MATERIAL CARBIDE TIPPED HOLE SAW KITS

LXAH47SET

7 PIECE

2-1/8", 2-9/16", 3-5/8"

Arbors: 2L SNAP-BACK™ with Self-Feed Pilot

3 Multi-Material Pilot Bits

LARGE KIT



LXAH411SET

11 PIECE

2-1/8", 2-1/4", 2-9/16", 2-3/4", 3-5/8", 4", 4-5/8"

Arbors: 2L SNAP-BACK™ with Self-Feed Pilot

3 Multi-Material Pilots

LARGE KIT



SPEED SLOT® BI-METAL HOLE SAW WITH T3 TECHNOLOGY®



DIAMETER		1 PER BOX	1 PER BLISTER SEAL	1 PACK ARBORED	PIPE TAP		PIPE ENTRANCE		USE ARBOR	
IN	MM	PROD NO	PROD NO	PROD NO	IN	MM	IN	MM	SNAP-BACK™	STANDARD
3-1/8	79.4	3005050L	2079613	1772964	—	—	—	—	2L, 6L	2L, 3L, 6L OR 7L
3-1/4	82.6	3005252L	2060602	1772966	3	76.2	—	—	2L, 6L	2L, 3L, 6L OR 7L
3-3/8	85.7	3005454L	2079614	1772945	—	—	—	—	2L, 6L	2L, 3L, 6L OR 7L
3-1/2	88.9	3005656L	2060595	1772946	—	—	—	—	2L, 6L	2L, 3L, 6L OR 7L
3-5/8	92.1	3005858L	2060597	1772949	—	—	3	76.2	2L, 6L	2L, 3L, 6L OR 7L
3-3/4	95.3	3006060L	2079615	1772950	3-1/2	85.7	—	—	2L, 6L	2L, 3L, 6L OR 7L
3-7/8	98.4	3006262L	2079616	1773001	—	—	—	—	2L, 6L	2L, 3L, 6L OR 7L
4	101.6	3006464L	2059708	1773002	—	—	—	—	2L, 6L	2L, 3L, 6L OR 7L
4-1/8	104.8	3006666L	2060593	1773003	—	—	3-1/2	85.7	2L, 6L	2L, 3L, 6L OR 7L
4-1/4	108.0	3006868L	2059710	1773004	4	95.3	—	—	2L, 6L	2L, 3L, 6L OR 7L
4-3/8	111.1	3007070L	2079617	1773005	—	—	—	—	2L, 6L	2L, 3L, 6L OR 7L
4-1/2	114.3	3007272L	2059709	1773006	—	—	—	—	2L, 6L	2L, 3L, 6L OR 7L
4-5/8	117.5	3007474L	2079618	—	—	—	4	95.3	2L, 6L	2L, 3L, 6L OR 7L
4-3/4	120.7	3007676L	2079619	1773008	4-1/2	108.0	—	—	2L, 6L	2L, 3L, 6L OR 7L
5	127.0	3008080L	2060591	—	—	—	—	—	2L, 6L	2L, 3L, 6L OR 7L
5-1/2	139.7	3008888L	2079620	—	—	—	—	—	2L, 6L	2L, 3L, 6L OR 7L
6	152.4	3009696L	2059707	—	—	—	—	—	2L, 6L	2L, 3L, 6L OR 7L

SPEED SLOT® BI-METAL HOLE SAW WITH T3 TECHNOLOGY® KITS

CONVENIENT STORAGE FOR TRADE-SPECIFIC USES

DURABLE

Durable construction for tough workplace environments

SECURE

Latches close case tightly and securely

LONG LASTING

Metal latches and metal pin hinges



LARGE KIT
10" H X 14" W
MEDIUM KIT
8" H X 11" W
COMPACT KIT
4-11/16" H X 7-1/2" W
MINI KIT
9" H X 5" W



ARBORED KIT



34081600AE
6 PIECE KIT
ELECTRICIAN'S KIT

7/8", 1-1/8", 1-3/8",
1-3/4", 2", 2-1/2"

LARGE KIT

CONTRACTOR'S KITS



30370400G
5 PIECE KIT

2", 3", 3-3/8", 4-1/8"
Standard
Arbor: 2L

LARGE KIT



30374500G
9 PIECE KIT

2-1/8", 2-9/16",
3-1/4",
3-3/4", 4-3/4"
Standard
Arbor: 2L

Three pilot drills

LARGE KIT



30807700G
9 PIECE KIT

7/8", 1", 1-1/4", 1-3/8", 1-1/2", 1-3/4",
2-1/8"
Standard Arbors: 5L, 6L

MEDIUM KIT



308042000G
26 PIECE KIT-BIG DADDY™

3/4", 7/8", 1", 1-1/8", 1-3/8", 1-1/2", 1-3/4",
2", 2-1/8", 2-1/4", 2-1/2", 2-11/16", 3", 3-1/4",
3-3/8", 3-5/8", 3-3/4", 4-1/8", 4-1/2", 4-3/4"
Standard Arbors: 1L, 2L, 5L

Three pilot drills

LARGE KIT



308201200G
17 PIECE KIT

5/8", 3/4", 7/8", 1", 1-1/8",
1-1/4", 1-3/8", 1-1/2",
1-3/4", 2", 2-1/2", 3"
Standard Arbors: 1L, 2L

Three pilot drills

LARGE KIT



1815140
7 PIECE KIT

7/8", 1", 1-1/8",
1-1/2", 2-1/8"
Standard Arbors:
2L, 5L

MINI KIT



ELECTRICIAN'S KITS



30856C600L
9 PIECE KIT
7/8", 1-1/8", 1-3/8", 1-3/4", 2", 2-1/2"
Standard Arbors: 2L, 5L

One Arbor adaptor

MEDIUM KIT



30800600L
10 PIECE KIT
7/8", 1-1/8", 1-3/8", 1-3/4", 2", 2-1/2"
Standard Arbors: 2L, 5L

One pilot drill
One Arbor adaptor

LARGE KIT



308021200L
17 PIECE KIT
3/4", 7/8", 1-1/8", 1-3/8", 1-3/4", 2",
2-1/2", 2-11/16", 3", 3-5/8", 4-1/8", 4-3/4"
Standard Arbors: 2L, 5L

Three pilot drills

LARGE KIT



1815139
8 PIECE KIT
7/8", 1-1/8", 1-3/8", 1-3/4", 2", 2-1/2"
Standard Arbors: 2L, 5L

MINI KIT



REFRIGERATION KIT



30830600R
8 PIECE KIT
5/8", 7/8", 1-1/8",
1-3/8", 1-5/8", 2-1/8"
Standard Arbors: 5L, 6L

MEDIUM KIT

PLUMBER'S KITS



30860C600P
9 PIECE KIT
3/4", 7/8", 1-1/8", 1-3/8", 2", 2-1/2"
Standard Arbors: 2L, 5L

One Arbor adaptor

MEDIUM KIT



30808600P
10 PIECE KIT
3/4", 7/8", 1-1/8", 1-1/2", 1-3/4", 2-1/4"
Standard Arbors: 2L, 5L

One pilot drill
One Arbor adaptor

LARGE KIT



1853786
10 PIECE KIT
2-1/8", 2-1/4", 2-9/16", 2-3/4", 3-5/8", 4",
4-5/8"
Standard Arbor: 2L

Two pilot drills

LARGE KIT



308011200P
17 PIECE KIT
3/4", 7/8", 1-1/8", 1-1/2", 1-3/4", 2-1/4",
2-9/16", 3", 3-1/2", 4", 4-1/4", 4-1/2"
Standard Arbors: 2L, 5L

Three pilot drills

LARGE KIT



1815195
7 PIECE KIT
1-1/4", 1-3/8", 1-1/2", 2", 2-1/2"
Standard Arbors: 2L, 5L

MINI KIT

AUTOMOTIVE KIT



30805500A
7 PIECE KIT
3/4", 7/8", 1",
1-1/8", 1-1/4"
Standard Arbor: 5L

One Arbor adaptor

COMPACT KIT

LENOX® DIAMOND™ HOLE SAWS

MORE HOLES. LESS TIME.

LONG LASTING

Continuous, brazed edge for long life in tile and stone

DURABLE

Robust design for durability in tough applications

FAST, EASY CUTTING

Low torque, little pressure required

EASY PLUG REMOVAL

Over-sized slot in hole saw for easy plug removal

Use standard Arbor, SNAP-BACK™ Arbor for best results use the LENOX Arbor with Retractable Pilot Drill



ONE PIECE HOLE SAWS

1 PER PACK PROD NO	PIPE TAP		PIPE ENTRANCE		RPM		
	IN	MM	IN	MM	IN	MM	
121063DGDS	3/16	5	—	—	—	1500 2000	
121074DGDS	1/4	6	—	—	—	2000 2500	
121085DGDS	5/16	8	—	—	—	2000 2500	
121096DGDS	3/8	10	—	—	—	2000 2500	
121108DGDS	1/2	13	—	—	—	2000 2500	
121110DGDS	5/8	16	—	—	—	1500 2000	
1211212DGDS	3/4	19	3/4	13	3/8 10	1500 2000	
1211416DGDS	1	25	—	—	—	—	
1211622DGDS	1-3/8	35	—	—	1 25	—	
12158DGDS4A	4 PC KIT SIZES: 3/16", 1/4", 5/16", 3/8"						



STANDARD HOLE SAWS

1 PER PACK PROD NO	PIPE TAP		PIPE ENTRANCE		USE ARBOR			RPM	
	IN	MM	IN	MM	RETRACTABLE	SNAP-BACK™	STANDARD	IN	MM
1211314DGHS	7/8	22	3/4	19	1/2 13	—	5L	1L, 4L, 5L	800 1200
1225618DGHS	1-1/8	29	1 25	3/4 19	—	—	5L	1L, 4L, 5L	500 900
1211520DGHS	1-1/4	32	—	—	—	5L 5/8-18	2L, 6L	2L, 3L, 6L	500 900
1211722DGHS	1-3/8	35	—	—	1 25	5L 5/8-18	2L, 6L	2L, 3L OR 6L	500 900
1211824DGHS	1-1/2	38	1-1/4 32	—	—	5L 5/8-18	2L, 6L	2L, 3L, 6L, 7L	500 900
1211932DGHS	2	51	—	—	1-1/2 38	5L 5/8-18	2L, 6L	2L, 3L, 6L, 7L	400 800
1212040DGHS	2-1/2	64	—	—	2 51	5L 5/8-18	2L, 6L	2L, 3L, 6L, 7L	200 600

Suggested RPMs only: Porcelain, Ceramic, Slate, Granite, Marble, Glass, Fiberglass, Travertine, Cement Board, Laminates
*This hole saw uses manufactured diamonds engineered for cutting

ARBOR WITH RETRACTABLE PILOT DRILL

CENTERING PIN DESIGNED TO REDUCE WALKING

CARBIDE TIPPED FOR LONG LIFE



PROD NO	DESC	FITS DIAMOND HOLE SAWS	SIZES		SHANK TYPE	SHANK SIZE	
			IN	MM		IN	MM
1970538	5L 5/8-18	Standard	1-1/4-2-1/2	32-64	SOLID HEX	3/8 & LARGER	9.5 & LARGER

PROD NO	DESCRIPTION	CHUCK SIZE		FITS ARBOR
		IN	MM	SOLID HEX
1970540	Retractable Pilot Drill	1/4	6.4	5L 5/8-18

DIAMOND™ KIT



1853785
10 PIECE KIT
1/4", 3/4", 7/8", 1-1/8", 1-3/8", 2", 2-1/2"
Arbors: 2L, 5L. Hex Wrench

LARGE KIT

CARBIDE GRIT HOLE SAWS

DESIGNED FOR CUTTING ABRASIVE MATERIALS

CUTS ABRASIVE MATERIALS

Tungsten carbide grit cuts through fiberglass, ceramic tile, laminates and other abrasive materials

CLEAN CUTTING

Carbide grit edge designed not to snag or chip when cutting thin materials

USE STANDARD ARBOR OR SNAP-BACK™ ARBOR



1 PER BOX	DIAMETER		PIPE TAP		PIPE ENTRANCE		USE ARBOR		RECOMMENDED RPM ONLY		
	PROD NO	IN	MM	IN	MM	IN	MM	SNAP-BACK™	STANDARD	BRICK, DRYWALL, PORCELAIN, MARBLE, CERAMIC TILE	SLATE, FIBERGLASS, PARTICLE BOARD, LAMINATES, GRANITE, CEMENT
2994848CG	3	76.2	—	—	2-1/2	63.5	2L, 6L	2L, 3L, 6L, 7L	200	300	100
2995252CG	3-1/4	82.6	3	76.2	—	—	2L, 6L	2L, 3L, 6L, 7L	200	300	100
2995858CG	3-5/8	92.1	—	—	3	76.2	2L, 6L	2L, 3L, 6L, 7L	100	200	100
2996464CG	4	101.6	—	—	—	—	2L, 6L	2L, 3L, 6L, 7L	100	200	100
2996666CG	4-1/8	104.8	—	—	3-1/2	88.9	2L, 6L	2L, 3L, 6L, 7L	100	200	100

CARBIDE GRIT RECESSED LIGHTING HOLE SAWS

BEST FOR CUTTING ABRASIVE MATERIALS

LONG LIFE

Hard tungsten carbide grit edge for a long life in abrasive materials

FAST, EASY CUTTING

Continuous cutting edge for smooth cutting

LIMITS DUST / DEBRIS

Solid back design collects dust and debris



1 PER BOX	DIAMETER		FOR FIXTURES	USE ARBOR	
	PROD NO	IN		MM	SNAP-BACK™
30861438RL	4-3/8	111	Capri, Marco, Halo, Mini-Juno	2L	2L, 7L
12100538RL	5-3/8	137	Capri, Marco, Halo, Mini-Juno, Lightolier®	2L	2L, 7L
30862638RL	6-3/8	162	Capri, Halo, Pathway & Thomas	2L	2L, 7L
30863658RL	6-5/8	168	Juno, Progress & Pathway	2L	2L, 7L
30864678RL	6-7/8	175	Capri, Hubbell®, Lightolier®, Lithonia®, Marco, Prescolite®, & Progress	2L	2L, 7L

Use LXA9414CTPB or 1779771 Pilot Drill

HALO is a registered trademark of Halo Lighting, JUNO is a registered trademark of Juno Lighting Inc., LITHONIA is a registered trademark of Lithonia, Inc., LIGHTOLIER is a registered trademark of Lightolier, Inc., and PRESCOLITE is a registered trademark of Prescolite, Inc.



CARBIDE HOLE CUTTERS

DESIGNED SPECIFICALLY FOR SHEET METAL HOLE CUTTING

ACCURATE, BURR-FREE HOLES

Precision ground carbide teeth for fast cutting of clean, round holes

WILL NOT DAMAGE WORK

Over-drill stopper prevents the tool from penetrating beyond the hole

STARTS ON CONTACT

Split point pilot bit designed for fast penetration and to reduce walking



1 PER BOX	DIAMETER		CONDUIT SIZE	USE ARBOR	
	PROD NO	IN		MM	SNAP -BACK®
2009212CHC	3/4	19.1	3/8"	5L	1L, 4L, 5L
2009314CHC	7/8	22.2	1/2"	5L	1L, 4L, 5L
2009416CHC	1	25.4	—	5L	1L, 4L, 5L
2009618CHC	1-1/8	28.6	3/4"	5L	1L, 4L, 5L
20097195CHC	1-7/32	30.9	—	5L	1L, 4L, 5L
2009820CHC	1-1/4	31.8	—	2L, 6L	2L, 3L, 6L
2010022CHC	1-3/8	34.9	1"	2L, 6L	2L, 3L, 6L
2010224CHC	1-1/2	38.1	—	2L, 6L	2L, 3L, 6L
2010328CHC	1-3/4	44.5	1-1/4"	2L, 6L	2L, 3L, 6L
2010432CHC	2	50.8	1-1/2"	2L, 6L	2L, 3L, 6L
2010534CHC	2-1/8	54.0	—	2L, 6L	2L, 3L, 6L
2010840CHC	2-1/2	63.5	2"	2L, 6L	2L, 3L, 6L
2010942CHC	2-5/8	66.7	—	2L, 6L	2L, 3L, 6L
2011344CHC	2-3/4	69.9	—	2L, 6L	2L, 3L, 6L
2011448CHC	3	76.2	2-1/2"	2L, 6L	2L, 3L, 6L
3087935PD	1/4" Split Point Stubby Pilot Bit		—	—	2L, 3L, 6L



ELECTRICIAN'S KITS

30877300CHC 12 PIECE KIT

7/8", 1-1/8", 1-3/8" Arbors: 3L, 5L
1/4" split point pilot bit. Plug
ejection springs, 1/8" hex
wrench

COMPACT KIT



30878500CHC 15 PIECE KIT

7/8", 1-1/8", 1-3/8", 1-3/4", 2", 2-1/2"
Arbors: 3L, 5L. 1/4" split point pilot bit
Plug ejection springs, 1/8" hex wrench

MEDIUM KIT



LENOX PROTOOL LUBE® CUTTING TOOL LUBRICANT

EXTENDS TOOL LIFE

SHORTENS CUTTING TIME BY UP TO 50%

Provides smoother, cleaner cutting and dramatically longer tool life

REDUCES HEAT AND FRICTION

Water soluble, so it cleans up with water

Biodegradable and non-toxic



PROD NO	CONTAINER SIZE		CONTAINERS PER CASE	NFPA CODE SPECS	
	GALLON	LITER		HEALTH	FIRE
68040LNx	6 OZ	.17	12	1	0
68047	1	3.8	4	0	0

HMIS/WHMIS
 HEALTH INDEX - 1
 FLAMMABILITY - 0
 REACTIVITY - 0
 PERSONAL PROTECTION - A

SPECIAL HAZARD

Use this product as it comes from the container—do not mix with water. MSDS available in hard copy or downloadable from lenoxtools.com

LENOX® SNAP-BACK™ QUICK CHANGE ARBORS

TOOL-FREE BIT CHANGE

No allen key required to change LENOX® pilot bit*.

ANTI-JAM COLLAR

Reinforced collar drives hole saw without jamming or disengaging.

50% FEWER BREAKS*

Patent pending step bit design for less hole saw grabbing resulting in fewer pilot breaks.

UNIVERSAL HOLE SAW COMPATIBILITY

Accepts all threaded hole saws, no adapters required†.



* Only applies to LENOX® Pilot Drills
 ** vs previous generation LENOX® Pilot Drill drilling low carbon steel
 † For the Range of Diameters Listed On Packaging



STEP 1

Unlock Hole Saw



STEP 2

Unlock Pilot Bit

PROD NO	DESCRIPTION	COMPATIBLE HOLE SAW SIZES		SHANK SIZE	
		IN	MM	IN	MM
LXAH9912PBM	2L QC WITH STEP BIT PILOT DRILL	1-1/4" - 6"	31.8 - 152.4	1/2"	12.7
LXAH9938PBM	5L QC WITH STEP BIT PILOT DRILL	9/16" - 1-3/16"	14.3 - 30.2	3/8"	9.5
LXAH9912CPBM	2L QC WITH CARBIDE & SELF-FEED PILOT DRILL	1-1/4" - 6-1/4"	31.8 - 158.8	1/2"	12.7

STANDARD ARBORS & ACCESSORIES

ARBORS & ACCESSORIES FOR YOUR DRILLING NEEDS

DURABILITY

Hardened carbon steel for strength

STARTS ON CONTACT

Split point pilot drill designed for fast penetration and to reduce walking



LENOX 6L Standard Arbor with quick change feature (1779805)

PROD NO	DESC	FITS HOLE SAWS		SIZES		SHANK		SHANK SIZE		PRIMARY FEATURE
		IN	MM	IN	MM	TYPE	IN	MM		
1779774	1L	9L-19L	9/16-1-3/16	14.3-30.2	HOLLOW HEX	1/2 & LARGER	12.7 & LARGER	Adjustable pilot bit		
1779801	2L	20L-96L	1-1/4-6	31.8-152.4	SOLID HEX	1/2 & LARGER	12.7 & LARGER	Use for enlarging holes		
1779802	3L	20L-96L	1-1/4-6	31.8-152.4	SOLID HEX	1/2 & LARGER	12.7 & LARGER	Solid shank		
1779803	4L	9L-19L	9/16-1-3/16	14.3-30.2	3 SIDED	1/4 & LARGER	6.4 & LARGER	Adjustable pilot bit, 3 flats on shank		
1779804	5L	9L-19L	9/16-1-3/16	14.3-30.2	HEX	3/8 & LARGER	9.5 & LARGER	Use for 9A-19A arbored hole saws		
1779805	6L	20L-96L	1-1/4-6	31.8-152.4	HEX	3/8 & LARGER	9.5 & LARGER	Quick change arbor		
1779806	7L	24L-96L	1-1/2-6	31.8-152.4	HEX	3/8 & LARGER	9.5 & LARGER	Plug ejection feature		

PROD NO	DESCRIPTION	CHUCK SIZE		FITS ARBOR	
		IN	MM	SNAP-BACK™	SOLID HEX
30857AA1	Standard Arbor Adaptor (1 pack)	—	—	5L	1L, 4L, 5L
3084818X	18" Extension (1 pack)	1/2 & LARGER	12.7 & LARGER	2L	1L, 2L, 3L
3084712X	12" Extension (1 pack)	1/2 & LARGER	12.7 & LARGER	2L	1L, 2L, 3L
3084310X*	10" Extension (1 pack)	3/8 & LARGER	9.5 & LARGER	5L, 6L	5L, 6L, 7L
3084655X	5-1/2" Extension (1 pack)	1/2 & LARGER	12.7 & LARGER	2L	1L, 2L, 3L
3087935PD	1/4" Split point stubby pilot bit	—	—	—	—

* Fits arbored hole saws

LENOX HOLE SAW PILOT DRILLS

QUICK CHANGE

For Tool-Free use In LENOX Snap-Back™ Arbors

UNIVERSAL COMPATIBILITY

Fits both quick change and traditional non-quick change arbors†



PROD NO	DESCRIPTION	LENGTH		DIAMETER		COMPATIBLE		PACK SIZE	APP ICON
		IN	MM	IN	MM	SNAP-BACK™ ARBORS	TRADITIONAL ARBORS		
LXAH99314PB	3-1/4" (83MM) PILOT DRILL 1 PK	3-1/4"	82.6	1/4"	6.4	2L QC, 5L QC	1L, 2L, 3L, 4L, 5L, 6L	1	
LXAH99314PB25	3-1/4" (83MM) PILOT DRILL 25 PK	3-1/4"	82.6	1/4"	6.4			25	
LXAH99414PB	4-1/4" (108MM) PILOT DRILL 1 PK	4-1/4"	108.0	1/4"	6.4			1	
LXAH99414PB25	4-1/4" (108MM) PILOT DRILL 25 PK	4-1/4"	108.0	1/4"	6.4			25	
LXAH99314CTPB	3-1/4" (83MM) CARBIDE PILOT DRILL 1PK	3-1/4"	82.6	1/4"	6.4			1	
LXAH9334MMPB	3-3/4" (95MM) CARBIDE PILOT DRILL 1PK	3-3/4"	95.3	1/4"	6.4			1	
LXAH99414CTPB	4-1/4" (108MM) CARBIDE PILOT DRILL 1PK	4-1/4"	108.0	1/4"	6.4			1	
LXAH9334SPB	3-3/4" (95MM) SELF-FEED PILOT DRILL 1PK	3-3/4"	95.3	3/8"	9.5			1	

†Excluding proprietary arbor systems not using standard 1/4" shank pilot drills

BI-METAL SHIP AUGER BITS

TOUGHER THAN NAILS

EXTREME DURABILITY

High speed steel cutting edge for superior durability in nail-embedded wood

LONG LIFE


High speed steel screw tip designed to provide wear resistance and long life

FAST, EASY DRILLING

Unique parabolic screw tip pulls the bit through material quickly and effortlessly

RESHARPENABLE

Resharpen with LENOX Diamond File (prod no. 25312DIAF1)



High Speed Steel Cutting Edge

Parabolic Tip



Our Bi-Metal technology fuses two premium steels together.

PROD NO	HOLE DIAMETER		OVERALL LENGTH		TWIST LENGTH	
	IN	MM	IN	MM	IN	MM
1455707A1216	3/4	19	7-1/2	191	4	102
1455907A1416	7/8	22	7-1/2	191	4	102
1456107A1616	1	25	7-1/2	191	4	102
1456307A1816	1-1/8	29	7-1/2	191	4	102
1456407A2016	1-1/4	32	7-1/2	191	4	102

All sizes 7/16" shank

PROD NO	HOLE DIAMETER		OVERALL LENGTH		TWIST LENGTH	
	IN	MM	IN	MM	IN	MM
145400080716*	7/16	11	18	457	12	305
145410080816*	1/2	13	18	457	12	305
145420080916	9/16	14	18	457	12	305
145430081016	5/8	16	18	457	12	305
145440081116	11/16	18	18	457	12	305
145450081216	3/4	19	18	457	12	305
145460081316	13/16	21	18	457	12	305
145470081416	7/8	22	18	457	12	305
145480081516	15/16	24	18	457	12	305
145490081616	1	25	18	457	12	305
145510081816	1-1/8	29	18	457	12	305
145520082016	1-1/4	32	18	457	12	305
145530082216	1-3/8	35	18	457	12	305
145540082416	1-1/2	38	18	457	12	305

*3/8" Shank. All others 7/16" shank



1787507
15 PIECE, SELF-FEED BIT/AUGER KIT
Augers: 7/8", 1-1/8", 1-1/4" Length: 7-1/2"
Self-feed bits: 1-1/2", 1-3/4", 2-1/8", 2-9/16"
Extension: 5-1/2" Five lead screws
Hex Wrench Set

LARGE KIT



BI-METAL UTILITY BITS

TOUGHER THAN NAILS

EXTREME DURABILITY

High speed steel cutting edges provide long life in tough applications, including nail-embedded wood

OPTIMIZED FOR CORDLESS DRILLING


Smooth, effortless drilling extends battery life

FAST CLEAN CUTTING

Three cutting edges enhance chip removal for a fast, clean hole

FAST, EASY DRILLING

Aggressive lead screw tip pulls the bit through material quickly and effortlessly

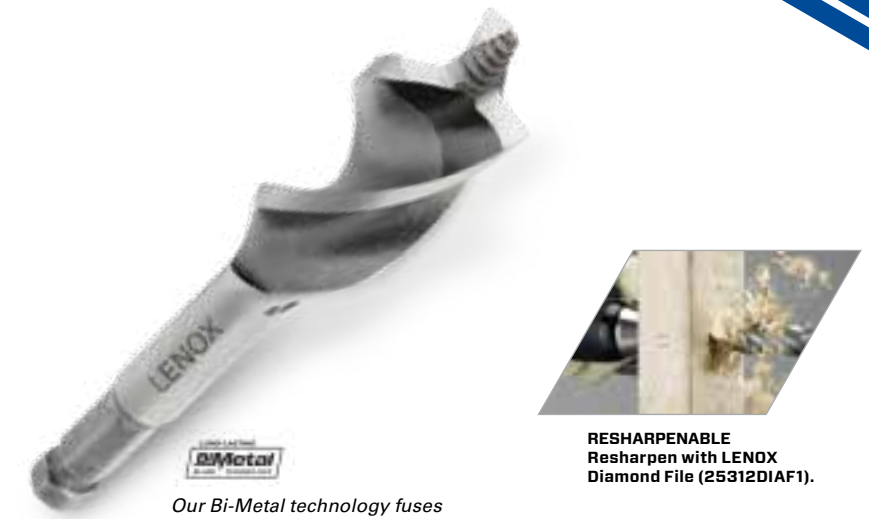

RESHARPENABLE
Resharpen with LENOX
Diamond File (25312DIAF1).

Our Bi-Metal technology fuses two premium steels together.

PROD NO	EXTENSION LENGTH		OVERALL LENGTH	
	IN	MM	IN	MM
1094706A1016	5/8*	16	6	152
1094806A1216	3/4	19	6	152
1094906A1416	7/8	22	6	152
1095006A1616	1	25	6	152
1095106A1816	1-1/8	29	6	152
1095206A2016	1-1/4	32	6	152
1095306A2216	1-3/8	35	6	152

*1/4" shank—all others 3/8" shank



Fits Cordless Drill

3 Cutting Edges

High Speed Steel Cutting Edges

UTILITY BIT ACCESSORIES

PROD NO	EXTENSION LENGTH		DESCRIPTION
	IN	MM	
3084310X	10"	254	Extension
1852047	12"	305	Quick Exchange Extension
25312DIAF1			Diamond File



AUGER BIT ACCESSORIES

PROD NO	EXTENSION LENGTH		DESCRIPTION	SHANK SIZE	
	IN	MM		IN	MM
3084310X	10"	254	Extension	3/8"	9.52
3084655X	5-1/2"	139.7	Extension	7/16"	11.11
3084712X	12"	304.8	Extension	7/16"	11.11
3084818X	18"	28.575	Extension	7/16"	11.11
1852047	12"	304.8	Quick Change Extension	3/8"	9.52
1852050	5-1/2"	139.7	Quick Change Extension	7/16"	11.11
1852048	12"	304.8	Quick Change Extension	7/16"	11.11
1852049	18"	457.2	Quick Change Extension	7/16"	11.11
25312DIAF1	—	—	Diamond File	—	—



10954300S
3 PIECE SET
3/4", 7/8", 1"



14787300PS
3 PIECE PLUMBER'S SET
7/8", 1-1/8", 1-3/8"



10955500K
5 PIECE KIT
3/4", 7/8", 1", 1-1/8", 1-1/4"
COMPACT KIT



14788500PK
5 PIECE PLUMBER'S KIT
3/4", 7/8", 1", 1-1/8", 1-3/8"
COMPACT KIT

BI-METAL SELF-FEED BITS

TOUGHER THAN NAILS

EXTREME DURABILITY

High speed steel cutting edge for superior durability in nail-embedded wood

Stays sharper longer

CLEAN HOLES AND EASY REMOVAL

Chamfered edge allows bit to be removed easily after drilling

Flutes remove excess wood chips

FAST, EASY DRILLING

Aggressive lead screw tip pulls the bit through material quickly and effortlessly

INCREASED VALUE

Extra lead screw and wrench included in every package

DEEP CUTS

Long shank that cuts 4" x 4" without extension

QUICK CHANGE

Impact hex shank allows for quick changing of the bits



RESHARPENABLE
Resharpen with LENOX
Diamond File (25312DIAF1).



Our Bi-Metal technology fuses
two premium steels together.



Chamfered Edge & Flutes

Lead Tip Screw

High Speed Steel

PROD NO	EXTENSION LENGTH		ENTRANCE FOR PIPE RIGID CONDUIT		ENTRANCE FOR TUBING	
	IN	MM	IN	MM	IN	MM
1787511	1"	25	1/2"	12.7	7/8"	22.2
1787512	1-1/8"	29	1/2"	12.7	1"	25.4
1787513	1-1/4"	32	3/4"	19	1-1/8"	28.6
1787515	1-3/8"	35	1"	25.4	1-1/4"	31.8
1787561	1-1/2"	38	—	—	1-3/8"	34.9
1787562	1-3/4"	45	1-1/4"	31.8	1-1/2"	38.1
1787563	2"	51	1-1/2"	38.1	1-7/8"	47.6
1787564	2-1/8"	54	—	—	2"	50.8
1787565	2-1/4"	57	—	—	2-1/8"	54
1787566	2-9/16"	65	2"	50	2-1/2"	63.5
1787502	3"	76	2-1/2"	63	2-7/8"	73
1787503	3-5/8"	92	3"	76.2	3-1/2"	88.9
1787504	4-5/8"	118	4"	101.6	4-1/2"	114.3

PROD NO	DESCRIPTION	FITS		PACK
		IN	MM	QTY PER
1787602	Self-Feed Lead Screws	1"- 1-3/8"	25.4-34.9	5
1787604	Self-Feed Lead Screws	1-1/2"- 2-9/16"	38.1-65	5
1787605	Self-Feed Set Screws	—	—	5
3084655X*	5-1/2" Extension	—	—	1
3084712X*	12" Extension	—	—	1
3084818X*	18" Extension	—	—	1
1852049**	18" Quick Change Extension	—	—	1
1852050**	5-1/2" Quick Change Extension	—	—	1
1852048**	12" Quick Change Extension	—	—	1
25312DIAF1	Diamond File	—	—	1

*All have 7/16" (11.11 mm) hex shank with 2 set screws to lock Bi-Metal self-feed bit in place.
**All have 7/16 (11.11 mm) hex shanks



1787505 12 PIECE SELF-FEED KIT

1-3/8", 1-1/2", 2-1/8", 2-9/16"
Extension: 5-1/2" Five lead
screws, Hex Wrench Set

LARGE KIT



1787506 16 PIECE SELF-FEED KIT

1-1/8", 1-1/4", 1-3/8", 1-1/2", 1-3/4",
2-1/8", 2-9/16" Extensions: 5-1/2", 12",
Five lead screws, Hex Wrench Set

LARGE KIT



1787507 15 PIECE SELF-FEED BIT/AUGER KIT

Augers: 7/8", 1-1/8", 1-1/4", Length: 7-1/2"
Self-feed bits: 1-1/2", 1-3/4", 2-1/8", 2-9/16",
Extension: 5-1/2", Five lead screws,
Hex Wrench Set

LARGE KIT



T2™ TECHNOLOGY HACKSAW BLADES

T2™ TECHNOLOGY

Blade design delivers up to 2X longer blade life versus the prior generation of LENOX hacksaw blades

SHATTER RESISTANT

Bi-Metal construction allows blades to bend and flex without breaking



TPI	LENGTH X WIDTH		1-PACK	2-PACK	10-PACK	100-PACK	APPLICATION
	IN	MM	PROD NO	PROD NO	PROD NO	PROD NO	
14	12 X 1/2	300 X 12.7	—	—	20143V214HE	—	Wood and Metal
18	10 X 1/2	254 X 12.7	—	20163T018HE	20140V018HE	—	Heavy Metal
18	12 X 1/2	300 X 12.7	20154S218HE	20160T218HE	20144V218HE	20116218HE	Heavy Metal
24	10 X 1/2	254 X 12.7	20151S024HE	23930T024HE	20141V024HE	20111024HE	Medium Metal
24	12 X 1/2	300 X 12.7	20155S224HE	20161T224HE	20145V224HE	20117224HE	Medium Metal
32	10 X 1/2	254 X 12.7	—	20164T032HE	20142V032HE	—	Thin Metal
32	12 X 1/2	300 X 12.7	20156S232HE	20162T232HE	20146V232HE	20118232HE	Thin Metal

LENOX HACKSAW BLADES

SHATTER RESISTANT

Bi-Metal construction allows blades to bend and flex without breaking

TPI	IN	MM	100-PACK	APPLICATION
			SKU	
18	12 X 1/2	300 X 12.7	1781387	METAL
24	12 X 1/2	300 X 12.7	1781388	METAL



HIGH TENSION HACKSAW

50,000 PSI

HIGH BLADE TENSION

Unique I-Beam construction allows blade to tension up to 50,000 psi, resulting in fast, straight cuts

COMFORTABLE GRIPS

Rubberized handles allow for confident handling even in wet or cold environments

CONVERT TO A JAB SAW

Accepts any LENOX reciprocating saw blade to be used as a jab saw

CONVENIENT BLADE STORAGE

Store up to 5 extra 12" hacksaw blades in the I-Frame



Tensioning Mechanism



Use as a Jab Saw



Stores up to 5 Blades in I-Frame



Comfortable Grips

PROD NO	BLADE SPECIFICATION
12132HT50	12" (305 mm) 24TPI Hacksaw Blade

LOW PROFILE HACKSAW

40,000 PSI

HIGH TENSION

Allows blade to tension up to 40,000 PSI, resulting in fast, straight cuts

FITS INTO TIGHT SPOTS

Low profile tip easily handles close-quarter cuts

MULTI-PURPOSE

Mount blade at 45 degrees for flush cutting applications

PROD NO	BLADE SPECIFICATION
209205012	12" (305 mm) 24TPI Hacksaw Blade



LIGHTWEIGHT HACKSAW

30,000 PSI

HIGH TENSION

Saw will tension up to 30,000 PSI

ERGONOMIC GRIP

Front handle grip helps reduce fatigue in continuous cutting applications

MULTI-PURPOSE

Mount blade at 45 degrees for flush cutting applications

PROD NO	BLADE SPECIFICATION
1213188300	12" (305 mm) 24TPI Hacksaw Blade



COMPACT HACKSAW

20,000 PSI

ADJUSTABLE TENSION

Lightweight aluminum beam achieves tension up to 20,000 PSI

DURABLE GRIP

Long lasting metal handle

MULTI-PURPOSE

Mount blade at 45 degrees for flush cutting applications

PROD NO	BLADE SPECIFICATION
1805722	12" (305 mm) 24TPI Hacksaw Blade



ADJUSTABLE HACKSAW

15,000 PSI

EASILY ADJUST TENSION

Large front tensioning mechanism is easy to hold and adjust up to 15,000 PSI

ERGONOMIC GRIP

Rubberized grip allows for confident handling in any work environment

ADJUSTABLE FRAME

Frame will accept both 10" and 12" Hacksaw Blades

PROD NO	BLADE SPECIFICATION
1805723	12" (305 mm) 24TPI Hacksaw Blade



LIGHT DUTY HACKSAW

12,000 PSI

ADJUSTABLE TENSION

Lightweight aluminum beam achieves tension up to 12,000 PSI

ROBUST TENSIONING MECHANISM

Keeps parts in place when changing the blade

ERGONOMIC GRIP

Durable handle enables a confident grip in most work environments

MULTI-PURPOSE

Mount blade at 45 degrees for flush cutting applications

PROD NO	BLADE SPECIFICATION
1884466	12" (305 mm) 24TPI Hacksaw Blade



MINI HACKSAW

FITS INTO TIGHT SPACES

COMFORTABLE GRIP

Ergonomic handle design for comfort

TOOL FREE BLADE CHANGE

Toolless blade change design reduces down time

FITS INTO TIGHT SPOTS

Adjustable blade length for flush cutting applications

ADDED VERSATILITY

Accepts both 10" and 12" hacksaw blades or any length of reciprocating saw blade

PROD NO	BLADE SPECIFICATION
LX2014041	10" (254 mm) 24TPI Hacksaw Blade



PLASTIC PIPE HAND SAW

PVC/ABS

CUTS PLASTIC PIPE EASILY

Cutting teeth cut on the pull stroke and not on the push stroke for safety

COMFORTABLE GRIPS

Rubberized handles allow for confident handling even in cold, hot, wet or dirty environments

FLUSH CUTTING OPTION

Easily mount the blade on the bottom of handle for flush cutting applications



TPI	LENGTH		PROD NO	DESCRIPTION
	IN	MM		
10	12	305	20985HSF12	12" Blade & Handle
10	18	457	20980HSF18	18" Blade & Handle
10	12	304	20982HSB12	12" Replacement Blade
10	18	457	20981HSB18	18" Replacement Blade



Comfortable Handle



One Step Flush Cuttings

FOLDING JAB AND UTILITY SAW

DESIGNED FOR CUTTING MULTIPLE MATERIALS

COMFORTABLE GRIP

Over-molded rubberized grip for a comfortable and secure grip while working

SECURELY HOLDS BLADE

Aluminum locking mechanism helps prevent blade from being removed during use

ACCOMMODATES HACKSAW BLADE

Ideal for flush cutting applications or when a hacksaw is not available



Rotate Blade Out



Loosen Knob to Change Blade

PROD NO	DESCRIPTION	BLADES INCLUDED	APPLICATION
20997TFHS618636	Folding Jab Saw with 2 Blades	635R and 6J6R	Plaster, drywall, wood, plastic and metal cutting
148216J6R	1pk Replacement Blades		

COMPACT HAND HACKSAW

CLOSE QUARTER™ SAW

Cut a Wide Variety in Tight Spaces

RUGGED DESIGN

Heavy duty aluminum handle

FITS IN TIGHT SPOTS

Allows for flush cutting applications


PROD NO	DESCRIPTION	TPI	BLADE LENGTH	
			IN	MM
20975975	Compact Hand Saw	24	10	254
20908908	Close Quarter™ Saw	32	6	152
20906906	10pk Replacement Blades	32	6	152



20975975



20908908

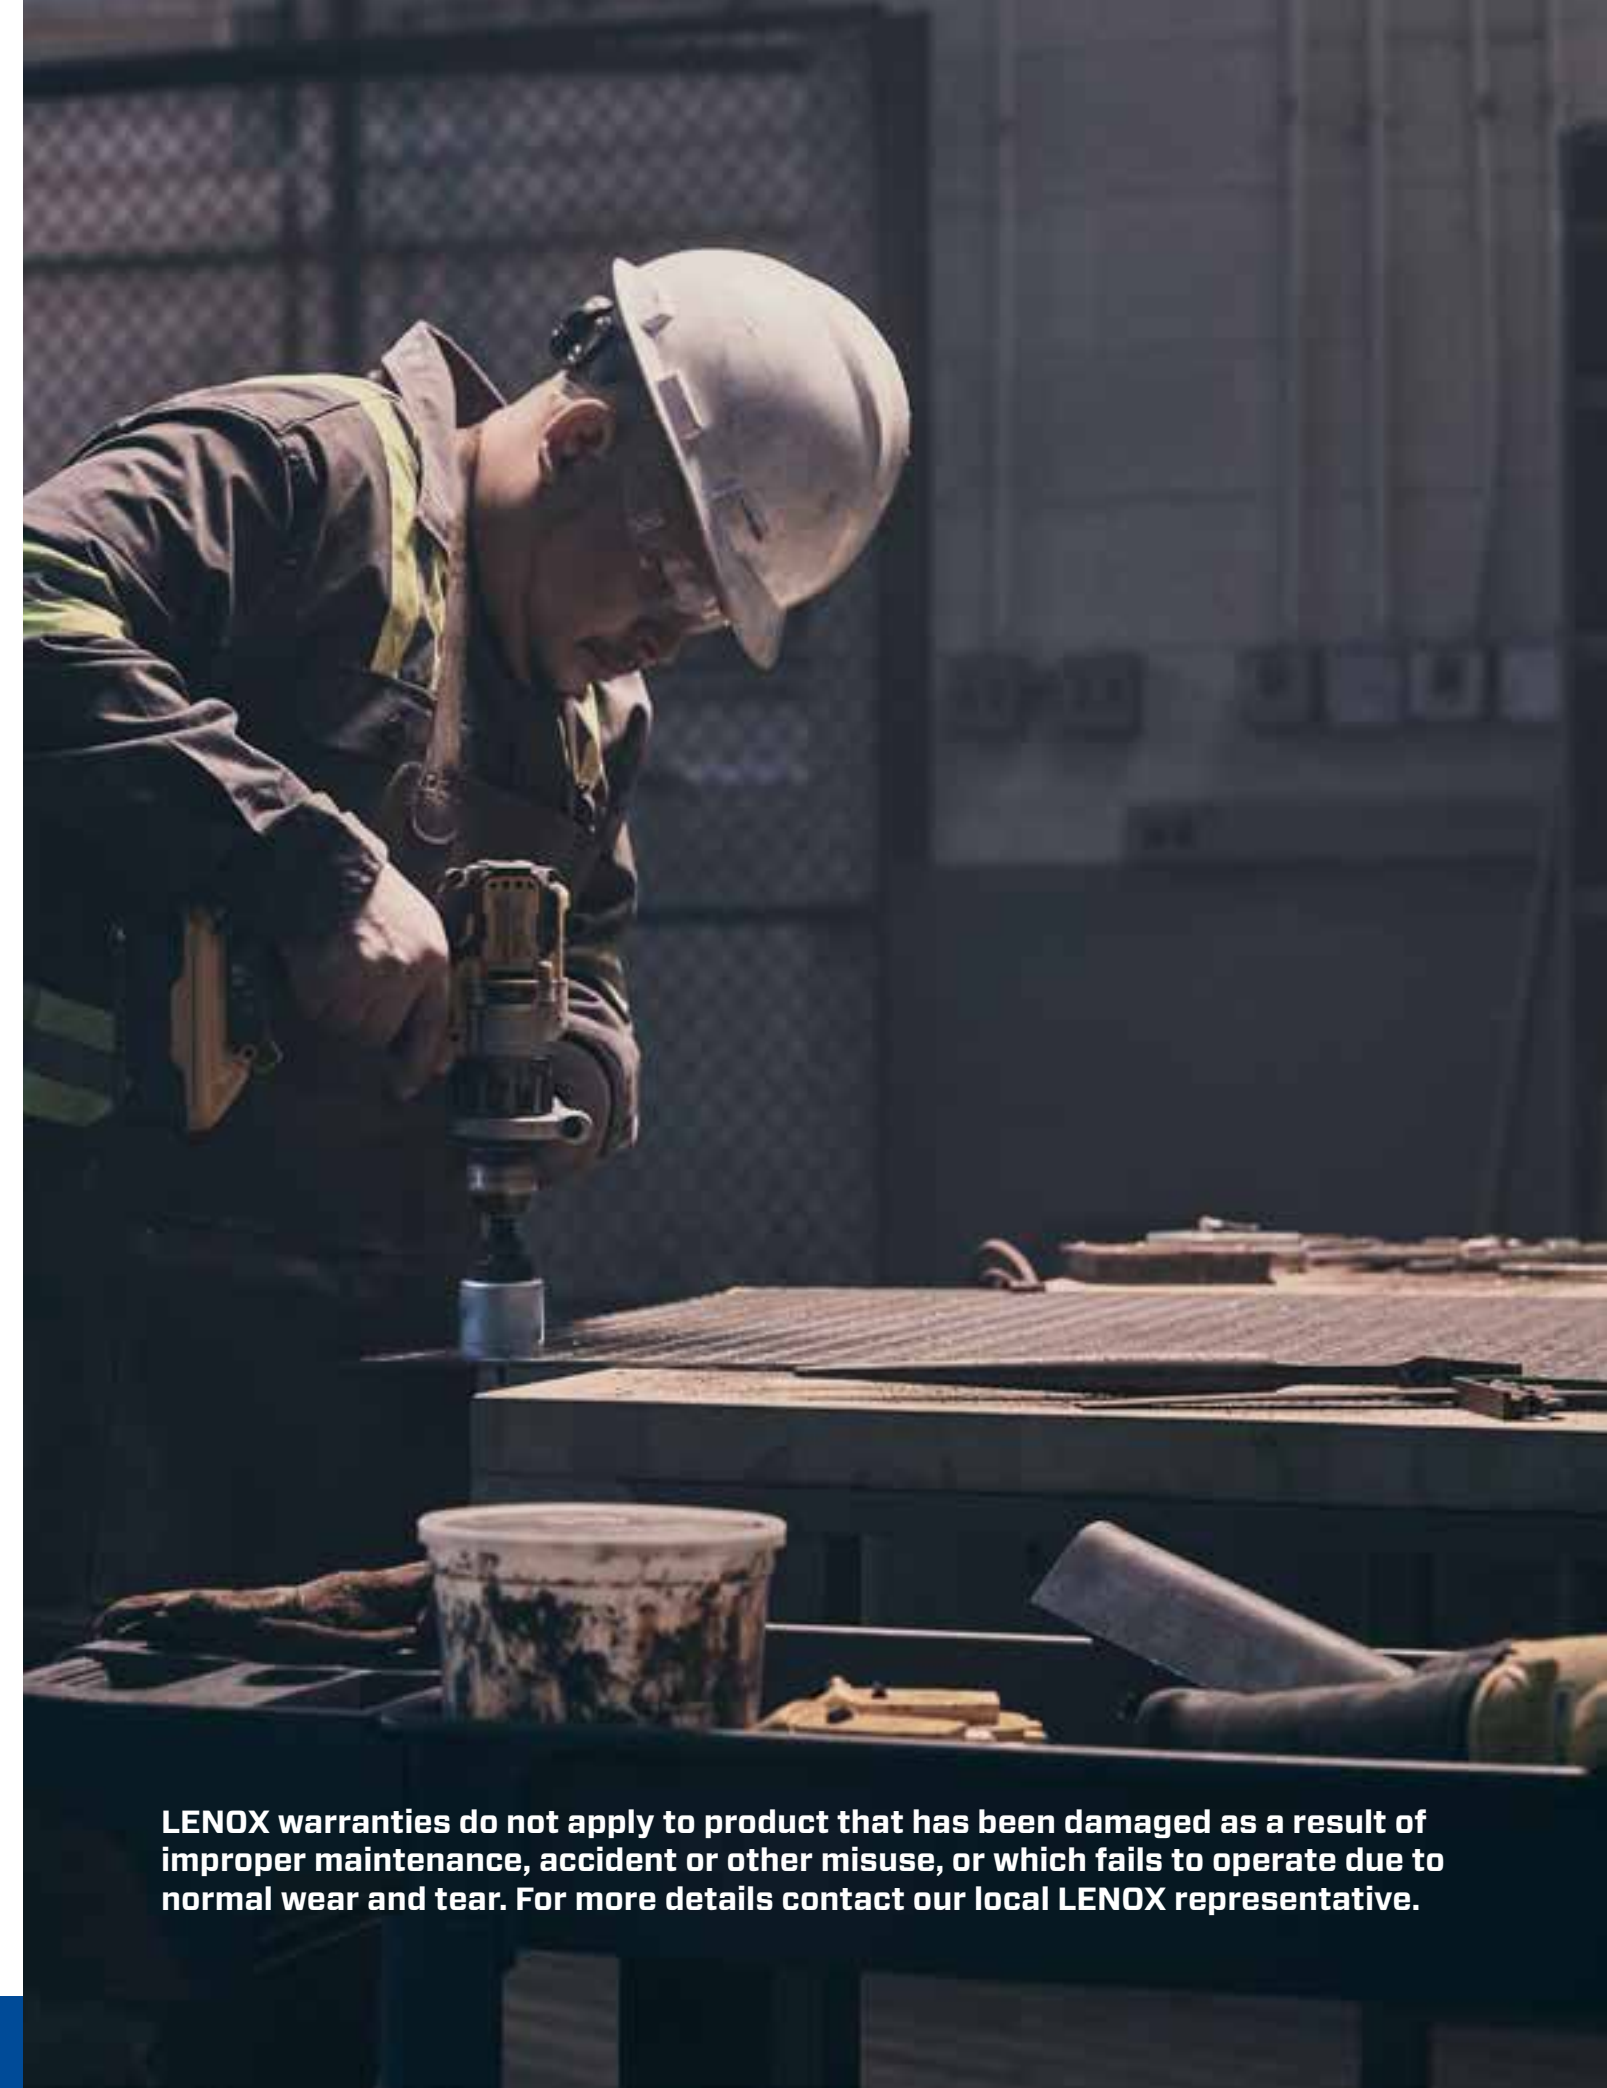

LENOX warranties do not apply to product that has been damaged as a result of improper maintenance, accident or other misuse, or which fails to operate due to normal wear and tear. For more details contact our local LENOX representative.



CONTACT :